


19" 16:10 FORMAT MONITOR

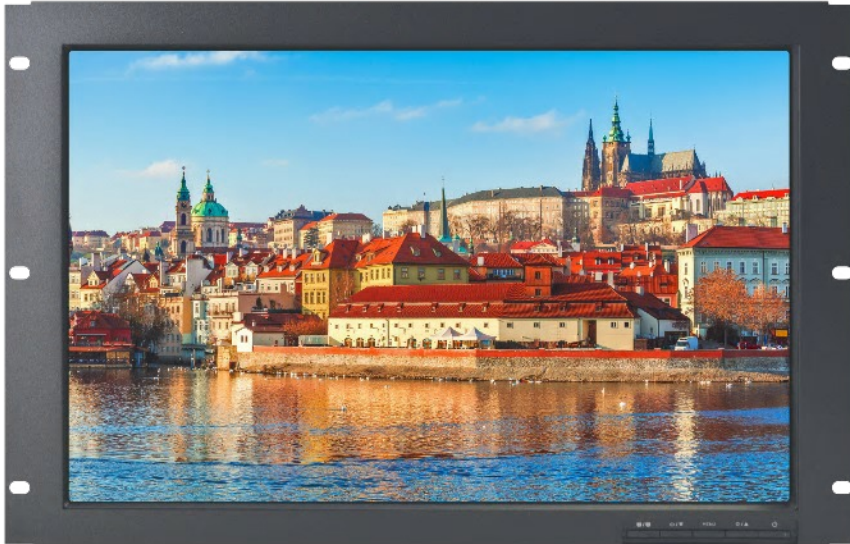

Commercial grade monitor in a steel frame
Mounts flush in 7U of 19" rack space
19" TFT LCD display with 1440 x 900 resolution
Wide format 16:10 aspect ratio
Analog (ARGB) and Digital (DVID) input connectors
Energy saving LED backlight
Fast 5 ms response time

GENERAL SPECIFICATIONS

Dimensions:
19.0" (W) x 12.25" (H) x 2.9" (D)

Weight:
10.7 lbs.

Power:
100 240 VAC, 50/60 Hz.
27 Watts.

OnScreen Controls:
Brightness, Contrast, Horizontal & Vertical
Position, Auto Adjust, OSD H & V Position, Input Select
Color Temp., Reset.

Plug & Play:
DDC2B

Temperature:
Operating: 10°C to 40°C
Storage: 20°C to 45°C

Humidity:
Operating: 10 to 80% RH (max)

Input Signal (VGA):
R.G.B. analog video, TTL H & V sync.

Input Signal (Digital):
DVI with HDCP.

Input Connectors:
Analog: 15pin mini DSub.
Digital: 24 pin DVID.

Colors Available:
Black.

DISPLAY SPECIFICATIONS

Display Type: Active matrix TFT LCD	Viewing Angle: Horizontal: 170° Vertical: 160°
Display area: 19" Wide.	Response Time: 5 ms.
Colors Displayed: 16.7 million colors.	Resolution: Up to 1440 x 900.
Contrast Ratio: 1,000:1 (10M:1 Dynamic)	Aspect Ratio: 16:10.
Brightness: 250 cd/m ² typ.L	Backlight type: LED

Specifications subject to change without notice.

MODEL NUMBER

LTRM419N3
LTRM419N3L with Lexan™ Screen Protection

*Contact us about other options and
our additional rack mount products.*



LAN TEK

www.Lan-Tek.net
Lantek@earthlink.net

1-800-660-2286

P.O. Box 3963
Landers, CA 92285
Tel: 760-364-2900
Fax: 760-364-4997