

19" RACK MOUNT LCD MONITOR



- 19" TFT LCD display (1280 x 1024 resolution) in only 8U (14.0") of rack space.
- Removable rack mounting brackets allow for additional mounting options.
- Wide Horizontal and Vertical viewing angles offer viewing flexibility.
- Controls mounted on side of monitor for a clean appearance.
- Optional Lexan™ (L) or 5 wire resistive touchscreen (T).
- Optional Composite and S-Video Inputs (V).

GENERAL SPECIFICATIONS

Dimensions:

19.0" (W) x 14.0" (H) x 1.7" (D)
1.7" (D) = .75" in front of mounting rails
.95" behind mounting rails.

Weight:

11 lbs

Power:

110 - 240 VAC, 50/60 Hz.
60 Watts max.

On-Screen Controls:

Brightness, Contrast, Horizontal & Vertical
Position, Auto Adjust, OSD H & V Position, Input Select
Color Temp., Reset.

Plug & Play:

DDC1 and DDC2B

Temperature:

Operating: 0°C to 50°C
Storage: -20°C to 60°C

Humidity:

Operating: 10 to 90% RH (max)

Input Signal (VGA):

R.G.B. analog video, TTL H & V sync.

Input Signal (Digital):

DVI-D (TDMS).

Input Connectors:

Analog: 15-pin mini D-Sub.
Digital: 24 pin DVI-D.

Colors Available:

Black.

DISPLAY SPECIFICATIONS

Display Type:

Active matrix TFT LCD

Display area:

19" Diagonal.

Colors Displayed:

16.7 million colors.

Contrast Ratio:

800:1 typ.

Brightness:

270 cd/m² typ.

Viewing Angle:

Horizontal: 178°
Vertical: 178°

Response Time:

18ms Typ.

Resolution:

VGA up to 1280 x 1024.

Horizontal Frequency:

31 to 80 KHz.

Vertical Frequency:

55 to 76 Hz.


Screen Protection:

Optional Lexan™ (L) or
5 Wire Resistive
Touchscreen (T).

Specifications subject to change without notice.

MODEL NUMBER

LTRM-909XX

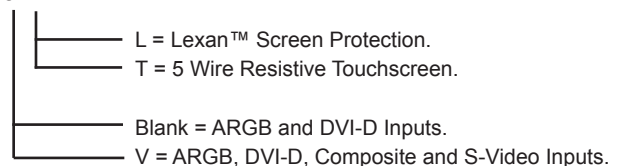

Offering OEM and custom solutions.
Contact us for additional information.

RECLANTEK, INC.

www.lantekrackmount.com

lantek@earthlink.net

1-800-660-2286

P. O. Box 549

Tel: 760-364-2900

Yucca Valley, CA 92286 Fax: 760-364-4997